

**Office of the Executive Engineer
MODS Zone-10, Dhaka WASA**

Estimate

Name of work: Repairing of leakage at delivery line of Uttara Apartment Procolpo-1 water pump, Sector-18, Uttara under MODS Zone-10 , Dhaka WASA.

SL no.	Description of the Item	Unit	Quantity	Rate(Tk.)	Amount(Tk.)
1	MS Pipe (Normal) 200 mm dia Thickness	P/M	2	3068	6136.00
2	Extra-Over item 1 for the supply lay of Ductile/Cast iron/M.S/GI fittings for MS pipes in according with the technical specification M.S Bend 45" dia	P/Nr	1	6545	6545.00
3	MS Dresser coupling 200mm dia	P/Nr	2	1400	2800.00
4	Bedding and surrounding by river saturated Sand. 1x1.82x3.8	Cum	6.92	1088	7528.96
5	Remove of loose soil 1x1.82x3.8	Cum	6.92	288	1992.96
6	Excavation (1.5x1.98x3.8)cum	Cum	11.29	149	1682.21
7	Palisading work by supplying of bitumen drum sheet	sqm	3.5	520	1820.00
8	Delivery line supporting pillar	L.S	2	5000	10000.00
9	Welding charge	L.S	1	5000	5000.00
10	Hire charge of De-watering Pump	P/Day	1	1862	1862.00
11	Safety Barriers	LS	1	4000	4000.00
				Total(TK)	49367.13

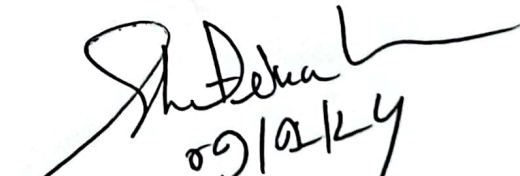
In Word: Forty Nine Thousand Three Hundred Sixty Seven Point One Three Only.


০৯/০৩/২৪

মোস্তাফিন বিল্লাহ আলমগীর
উপ-সহকারী প্রকৌশলী
মডস জোন-১০, ঢাকা ওয়াসা।


০৯/০৩/২০২৪

নূর মোহাম্মদ জিয়াউল হক
সহকারী প্রকৌশলী
মডস জোন-১০, ঢাকা ওয়াসা।


০৯/০৩/২৪
Md. Shafik Ahmmed Khan
Executive Engineer
MODS Zone-10, Dhaka Wasa