




M/s. Meer Engineering

Address: Dag No-862, Bhuyan Para, Meradia, khilgaon, Dhaka-1219
Mobile: +8801941-172538, Email: meereengineering2022@gmail.com

To
Excutive Engineer
MODS Zone-9, Dhaka WASA

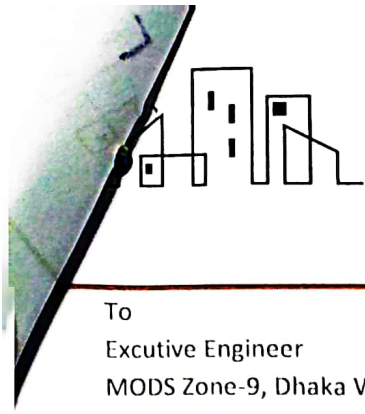

Payment Invoice

Name of Work/Supplier: Repairing of HDPE water line leakage if front of house no-Ka-/202/3 & removal of dirty water Khilkhet namapara road, Khilkhet railgate (DMA-909) under MODS Zone-9, Dhaka WASA

Contractor reference/Purchase order reference: Memo no: 46.05.0000.414.99.069.23-20 Dated: 08/08/2023
Date of completion: 12/08/2023

Sl. No.	Description Of Item	Quantity	Unit	Rate (TK)	Amount (TK)
1	110 mm dia HDPE Pipe	5	P/M	2024.00	10120.00
2	110 mm dia HDPE Sleeve E.F	4	Each	2250.00	9000.00
3	Generator & Electro-Fusion Mechhine Hire Charge	2	P/Day	4,000.00	8,000.00
4	Mechanic Charge(For Electro-Fusion Charge)	2	P/Person	1,500.00	3,000.00
5	Service Connection	2	Each	2,020.99	4,041.98
6	Excavation $(8 \times 0.76 \times 1.52) + \{3 \times (1.52 \times 1.52 \times 1.52)\} = 19.78 \text{m}^3$	19.78	Cum	288.00	5696.64
7	Supply, depositing and compaction of fine sand (FM 0.8) bedding surrounding and above pipe $(8 \times 0.76 \times 1.30) - 1.88 = 6.02 \text{cum}$	6.02	Cum	635.00	3822.70
8	Backfilling $8 \times 0.76 \times 0.91 + \{3 \times (1.52 \times 1.52 \times 0.91)\} = 11.85 \text{m}^3$	11.85	Cum	134.00	1587.90
9	Hire Charge Of de-Watering Pump	2	P/Day	1,862.00	3,724.00
10	Bamboo, Wooden, Planked Rope, G.I Wire for temporary shoring and boxing to the side of the excavation to maintain a safe working environment for and depths.	1	L/S	1,000.00	1,000.00
Total(TK)					49,993.22

In word: Forty Nine Thousand Nine Hundred Ninety Three Point Two Two Taka Only.

কিলকিট পাইপলাইন রক্ষা ও পাইপলাইন খসড়া করা। এবং পাইপলাইন
করা হবে।

Alimur
20.08.23
মোঃ মনিরুজ্জামান
উপ-সহকারী প্রকৌশলী
মডুস জোন-৯, ঢাকা ওয়াসা

20/8/23
মোঃ দেলোয়ার হোসেন
সহকারী প্রকৌশলী
মডুস জোন-৯
ঢাকা ওয়াসা

মোঃ মোজাহিদুর রহমান
20.08.23
নির্বাহী প্রকৌশলী (চঃ দাঃ)
মডুস জোন-৯, ঢাকা ওয়াসা

M/s. Meer Engineering
Proprietor