

Payment In-voice

Name of the Work: Repairing of leakage and Removal of polluted water at Mirpur-1 (Block A to H) and its surrounding area under MODS Zone-4, Dhaka WASA.


SL No	Description of the item	Unit	Quantity	Rate (Tk.)	Amount (Tk.)
1	Pvc pipe laying & fitting work				
	(b) 150 mm dia "C" class pvc pipe	P/M	39	805.001	31395.039
2	(c) 200 mm dia "C" class pvc pipe	P/M	27	1216.001	32832.027
3	150×150×150mm dia pvc Tee	P/Nr	10	1028.001	10280.010
4	200×150×200mm dia pvc Tee	P/Nr	7	1489.001	10423.007
5	PVC bend 90° 'C' class 150mm Dia	P/M	10	1130.001	11300.010
6	PVC bend 90° 'C' class 200mm Dia	P/M	9	2004.001	18036.009
7	PVC End Cap 150mm "C" Class	P/Nr	20	512.001	10240.020
8	PVC End Cap 200mm "C" Class	P/Nr	13	847.001	11011.013
9	a) 200 mm dia service clamp	Pair	21	550.001	11550.021
10	b) 150 mm dia service clamp	Pair	12	450.001	5400.012
11	b) 150 mm dia C.I D/C coupling	P/Nr	21	1227.001	25767.021
12	c) 200 mm dia C.I D/C coupling	P/Nr	18	1450.001	26100.018
13	Palisading work (24*1.52*2) = 72.96	sqm	72.96	613.001	44724.553
14	Bedding and surrounding by river saturated Sand. (70*0.6*0.76) - ((3.14*.15 ²)/4)*70 + ((1.52*1.52*.60)*15) = 51.48m ³	cum	51.48	1088.001	56010.291
15	Backfilling (70*0.76*0.91) - ((15*(1.52*1.52*0.91)) = 79.95m ³	cum	79.95	207.001	16549.730
16	Excavation (70*0.76*1.52) + (15*(1.52*1.52*1.52)) = 133.55 m ³	cum	133.55	288.001	38462.534
17	DN 20 to DN 25 mm dia	P/Nr	14	1216.001	17024.014
18	DN 32 to DN 50 mm dia	P/Nr	10	2021.001	20210.010
19	Placing of Mass concrete (1: 3:6) 0.4 m ³ *5 = 2.0 m ³	cum	2	8886.001	17772.002
20	Hire charge of de-watering Pump	P/day	19	1862.001	35378.019
21	Providing compacted sub-base course (50X 0.76X0.15) = 5.7 m ³	cum	5.7	5449.001	31059.306
22	Road Safety measures and tools as per direction of Engineer in Charge	LS	1	4000.001	4000.001

Grand Total = 485524.667


As Per Agreement 5% less = 24276.233

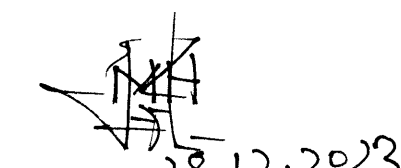
Grand Total Amount of TK= 461248.433

In Word: Four Lakh Sixty One Thousand Two Hundred Forty Eight Point Four Three Three Taka only.


28.12.2023

মোঃ আবুল কালাম আজাদ
উপ-সহকারী প্রকৌশলী
মডস জোন-৪, ঢাকা ওয়াসা।


28/12/23
মোঃ আমিনুল হক
সহকারী প্রকৌশলী
মডস জোন-৪, ঢাকা ওয়াসা।


28.12.2023
Md. Mazharul Islam
Executive Engineer
MODS Zone-4, Dhaka, WASA