

মুখাফিজুর রহমান
প্রথম প্রকৌশলী
ঢাকা ওয়াশা

৮। অনুচ্ছেদ-৪ (মাসিক অনুমোদিত অগ্রিমের ২০০০ টাকা (এক হাজার) মাত্র উত্তলন(নং. ৫৯) - (সেখানে দিয়ে বিক্রি হওয়া মর্মে উল্লেখচিত নথিটি হিসাব-বিভাগে প্রেরণের জন্য) যদ্য - প্রাপ্ত করা সম্ভব হলে।

[Signature]
২৪/৩
২০২৪

শাকিল আহমেদ
ক্যাশিয়ার
মডুস জোন-৬, ঢাকা ওয়াশা।

৮। অনুচ্ছেদ ৪ (মাসিক অনুমোদিত অগ্রিমের ২০,০০০ টাকা (এক হাজার চার-সাত হাজার) মাত্র উত্তলনের জন্য সেখানে দিয়ে বিক্রি হওয়া মর্মে উল্লেখচিত নথিটি হিসাব বিভাগে প্রেরণের জন্য যদ্য - প্রাপ্ত - করা সম্ভব হলে।

[Signature]
২৪/৩
২০২৪

শাকিল আহমেদ
ক্যাশিয়ার
মডুস জোন-৬, ঢাকা ওয়াশা।

SAE

[Signature]
২০/০৬/২৪
রাইফুল ইসলাম
উপ-সহকারী প্রকৌশলী
মডুস জোন-৬, ঢাকা-ওয়াশা

AE

[Signature]
২০/০৩/২৪
কাজী আঃ রহমান
সহকারী প্রকৌশলী
মডুস জোন-৬, ঢাকা ওয়াশা

[Signature]
২০/৩/২৪

প্রকৌঃ মোঃ এমরানুল ইসলাম
নির্বাহী প্রকৌশলী
মডুস জোন-৬, ঢাকা ওয়াশা।

OFFICE OF THE EXECUTIVE ENGINEER
MODS Zone-6, DHAKA WASA.

Estimate

Name of work: মডস জোন-৬ এর আওতাধীন ডিএমএ -৬১৪ এ ঢাকা ওয়াসার ওয়াটার কোয়ালিটি মনিটরিং ডিভাইস স্থাপন কাজ।

SI No	Description of Work	Rate Basis	Quantity	Unit	Unit Rate	Total Taka
1	2	3	4	5	6	7
1	Earth work in excavation up to the required depth for water pipe line chamber all kinds of soil precaution necessary to avoid damage of under ground utility service including removing the excavated earth & stacking the same to safe distance, De watering machine will be install for maintain the excavation site to dry condition at all time and disposal of surplus excavated materials etc. all complete as per drawing specification & direction of E/C.	PWD Rate-2022,2.1.(2+3)	1.5	Cum	198.00	297.00
2	Sand filling in foundation trenches and plinth with sand having F.M. 0.5 to 0.8 in 150mm layers including leveling, watering and compaction to achieve minimum dry density of 95% with optimum moisture content (Modified proctor test) by ramming each layer up to finished level as per design supplied by the design office only etc. all complete and accepted by the Engineer-in-charge.	PWD 2022-2.10.1	0.5	cum	1088	544.00
3	One layer of brick flat soling in foundation or in floor with first class or picked jhama bricks including preparation of bed and filling the interstices with local sand, leveling etc. complete and accepted by the Engineer-in-charge.	PWD 2022-3.1.1	2	sqm	518.00	1,036.00
4	Mass concrete (1:2:4) in foundation or in floor with cement, sand (F.M. 1.2) and picked jhama brick chips including breaking of chips, screening, mixing, laying, compacting to required level and curing for at least 7 days including the supply of water, electricity, costs of tools & plants and other charges etc. all complete and accepted by Engineer-in-charge.	PWD 2022-3.5.1	0.44	cum	8886.00	3,909.84
5	Labour	M/R	10	person	1000.00	10,000.00
6	Site cleaning work finish the work. Etc all complete as per E/C	l/s	1	nos	2000.00	2,000.00
7	Lock and key	M/R	1	nos	180.00	180.00
8	Ball valve	M/R	1	nos	400.00	400.00
9	Bush filter	M/R	1	nos	160.00	160.00
10	Scotch Tape	M/R	2	nos	10.00	20.00
11	Connector	M/R	1	nos	140.00	140.00
12	Electrical Cable	M/R	1	coil	2000.00	2,000.00
13	GI wire	MR	1	kg	250.00	250.00
14	Cable Tie	MR	1	bundle	250.00	250.00
15	Circuit Breaker	M/R	1	nos	250.00	250.00
16	Breaker Box	M/R	1	nos	50.00	50.00
17	Screw	M/R	30	nos	1.50	45.00
18	Thread Tape	M/R	1	nos	30.00	30.00
19	PVC Tape	M/R	2	nos	20.00	40.00
20	Flexible cover pipe	M/R	9.386	fit	3.00	28.16
Total Tk. =						21,630.00

(In word: Twenty One Thousand Six Hundred Thirty Taka Only)

২৪/০৬/২৪

রাফিকুল ইসলাম
উপ-সহকারী প্রকৌশলী
মডস জোন-৬, ঢাকা ওয়াসা


১৫/০৩/২৪

কাজী আঃ রহমান
সহকারী প্রকৌশলী
মডস জোন-৬, ঢাকা ওয়াসা

১৫/০৩/২৪
প্রকৌঃ মোঃ এমরানুল ইসলাম
নির্বাহী প্রকৌশলী
মডস জোন-৬, ঢাকা ওয়াসা

ANNUAL PROCUREMENT PLAN Financial Year 2023-24

Serial No	Package No	Description of Procurement Package (works, goods and services)	Unit	Quantity	Procurement Method & Type	Contract Approving Authority	Source of Fund	Allocation Code	Estimated/ Contract Cost (Taka in Lakh)	Time Code for Process	Invitation of Tender	Tender Opening	Tender Evaluation	Approval to Award	Notification of Award	Signing of Contract	Completion of Contract	Total Time (in Days)
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
38	W-26	Repairing & Maintenance work of water line Contamination / Dirty water Removal including all materials supply at DMA-601 to 605 and others area under MODS Zone-6, Dhaka WASA. (Lot-1) (Frame Work)	Lot	1	LTM (e-GP)	CE	REV	01-04-001	5.00	Planned Date Planned Days Actual Dates	1/8/2023 0 21	22/8/2023 21	5/9/2023 14	12/9/2023 7	19/9/2023 7	5/10/2023 14	5/4/2024 180	243
39	W-27	Repairing & Maintenance work of water line Contamination / Dirty water Removal including all materials supply at DMA-607 to 611 and others area under MODS Zone-6, Dhaka WASA. (Lot-2) (Frame Work)	Lot	1	LTM (e-GP)	CE	REV	01-04-001	5.00	Planned Date Planned Days Actual Dates	1/8/2023 0 21	22/8/2023 21	5/9/2023 14	12/9/2023 7	19/9/2023 7	5/10/2023 14	5/4/2024 180	243
40	W-28	Repairing & Maintenance work of water line Contamination / Dirty water Removal including all materials supply at DMA-613 to 617 and others area under MODS Zone-6, Dhaka WASA. (Lot-3) (Frame Work)	Lot	1	LTM (e-GP)	CE	REV	01-04-001	5.00	Planned Date Planned Days Actual Dates	1/8/2023 0 21	22/8/2023 21	5/9/2023 14	12/9/2023 7	19/9/2023 7	5/10/2023 14	5/4/2024 180	243
41	W-29	Lowering and leveling 110 mm dia HDPE water line and road repairing work at Meradia Haz Ansabagh area near Meradia Primary School water pump house, under MODS Zone-6, Dhaka WASA	Lot	1	RFO	CE	REV	01-04-001	5.00	Actual Dates								
42	W-30	Lowering and leveling 160 mm dia HDPE water line and road repairing work at Fakirapool 1no govt area near Fakirapool water pump house, under MODS Zone-6, Dhaka WASA	Lot	1	DPM	CE	REV	01-04-001	3.00	Actual Dates								
43	W-31	Lowering existing 160 mm dia water line and road repairing work Goran-35 no road near goran chadda moiso water pump house under MODS Zone-6	Lot	1	DPM	CE	REV	01-04-001	3.00	Actual Dates								
44		Allocation for Emergency and maintenance work (DPM as per PPR-2008 clause 76/1 (Ta), 81/1, 82/1) etc under MODS Zone-6, Dhaka WASA			LTM (e-GP) / DPM / RFO	MD/DMD / CE	REV	01-04-001	12.70									
Sewer Line Maintenance, Code No- (01-04-002)										Sub Total = 98.70 in Lakh								
Allocation Cost 95.00										in Lakh								
45	W-32	Rising, Repairing & Maintenance work of hidden or under pavement Sewer manhole Cover at DMA-605, 606, 608, 609 and others area under MODS Zone-6, Dhaka WASA. (Lot-1) (Frame Work)	Lot	1	LTM (e-GP)	CE	REV	01-04-002	5.00	Planned Date Planned Days Actual Dates	1/8/2023 0 21	22/8/2023 21	5/9/2023 14	12/9/2023 7	19/9/2023 7	5/10/2023 14	5/4/2024 180	243


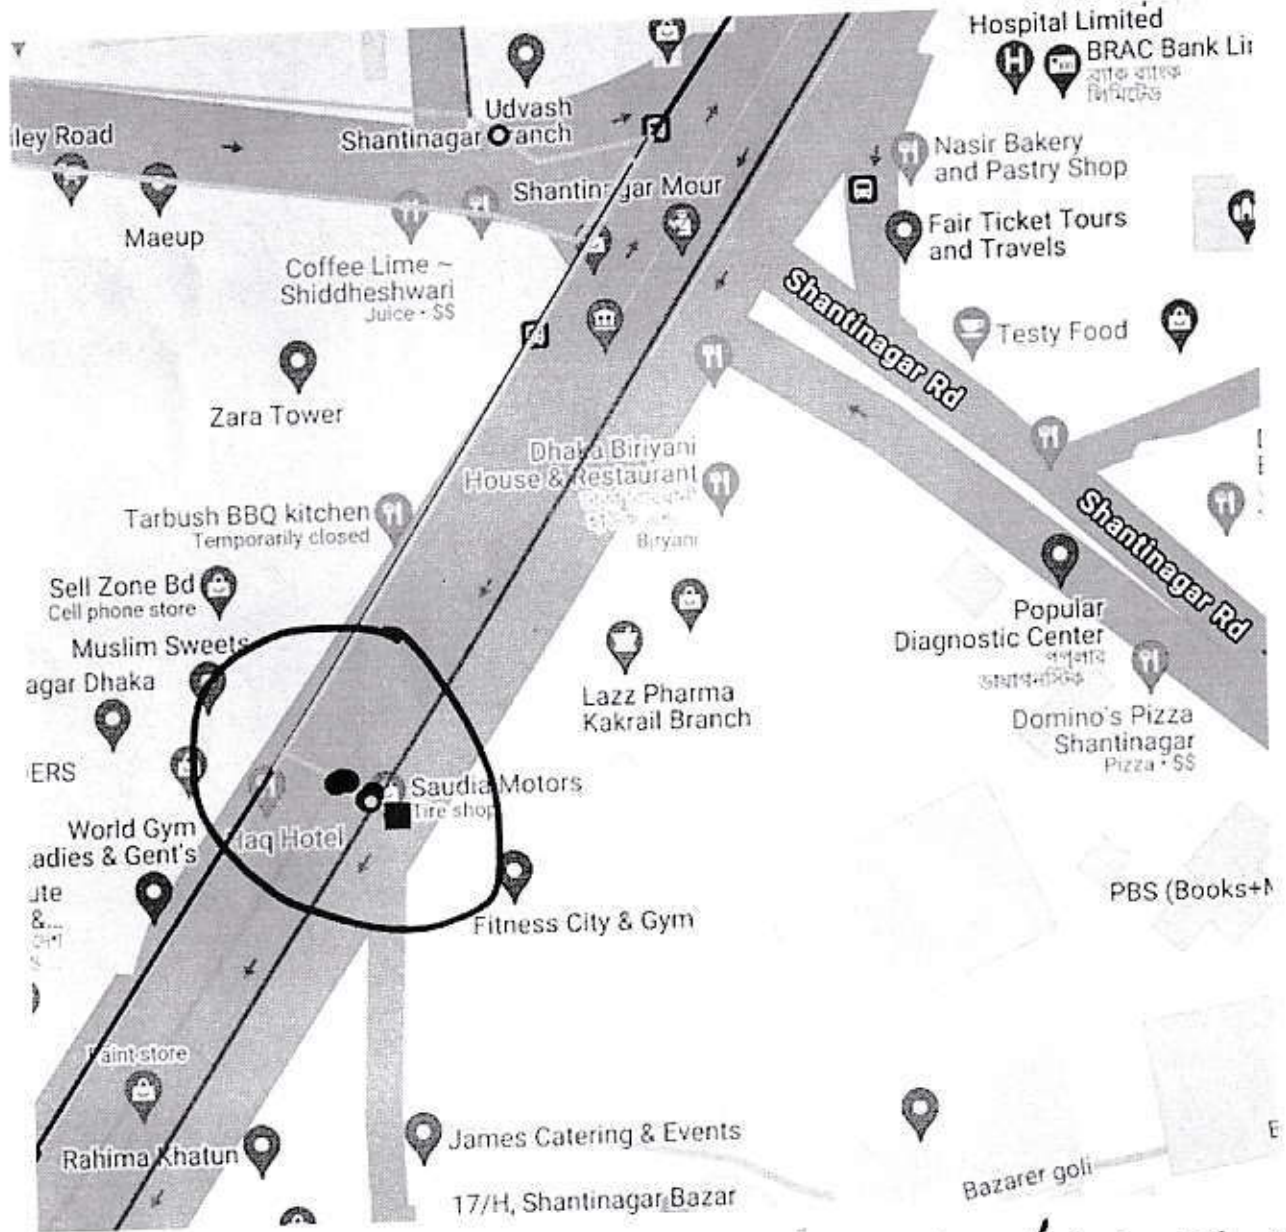


Proposed Installation Location: (Under Flyover)

স্বাক্ষর
২৮/০৬/২৪
রাইফুল ইসলাম
উপ-সহকারী প্রকৌশলী
মডুস জোন-৬, ঢাকা ওয়াশা

স্বাক্ষর
১৪/০৩/২৪
কাজী আবু মোহাম্মদ
সহকারী প্রকৌশলী
মডুস জোন-৬, ঢাকা ওয়াশা

স্বাক্ষর
২৮/০৬/২৪
প্রকৌঃ মোঃ এমরানুল ইসলাম
নির্বাহী প্রকৌশলী
মডুস জোন-৬, ঢাকা ওয়াশা।

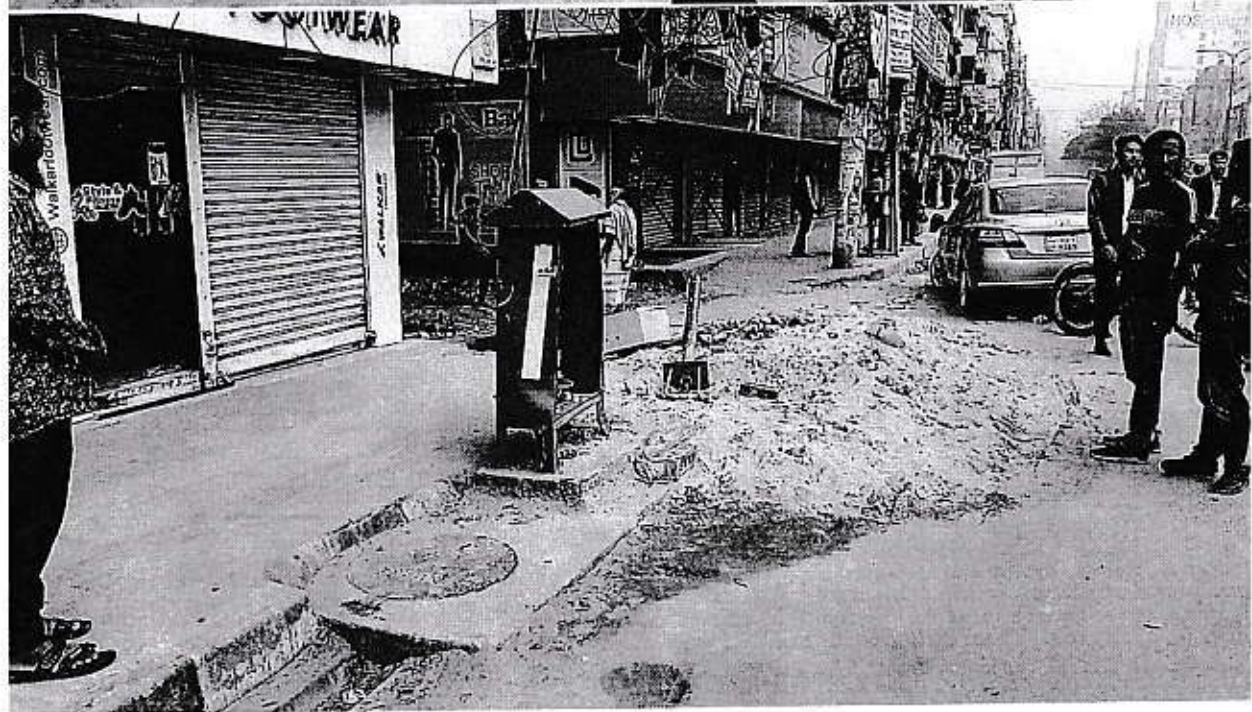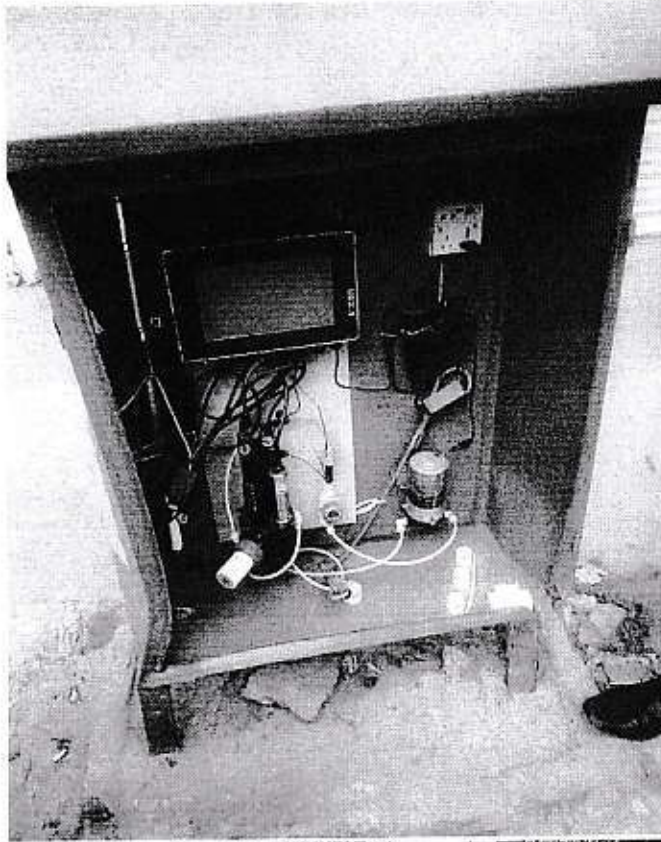

রাইফুল
26/06/28
রাইফুল ইসলাম
উপ-সহকারী প্রকৌশলী
মডস জোন-৬, ঢাকা-ওয়ারাস

কাজী আঃ রহমান
18/03/24
কাজী আঃ রহমান
সহকারী প্রকৌশলী
মডস জোন-৬ ঢাকা ওয়াস

9/8/28
প্রকৌঃ মোঃ এমদাদুল ইসলাম
নির্বাহী প্রকৌশলী
মডস জোন-৬, ঢাকা ওয়াস।